

KODIAK KDA10S 230V 1~+N 50Hz

BLAST CHILLER

10 Trays GN 1/1 - 600x400

Control	Digital
Load capacity	10 TRAYS 600x400 - GN 1/1
Outside dimension	790x760x1610 WxDxH
Weight	129 Kg
Package dimension	820x800x1645 WxDxH
Package weight	149 Kg
Trays spacing	74mm
Cooling capacity*	3000 W
Capacity per cycle	35 Kg +90°C -> +3°C 20 Kg +90°C -> -18°C
Refrigerant Gas	R452a (GWP 2141)
Max absorbed current	10,3 A
Max absorbed power	2195 W
Voltage/Frequency	230 V - 1~ +N / 50 Hz
Internal/External finishing	FINGERPRINT FREE
Insulation	HDPI polyurethane - 60 mm thickness
Door gasket	Removable, magnetic
Anti-condensation door frame	Inspectable heated
Climatic class	4
Condensing unit	+38°C
Evaporator fan	Low temperature bearings
Evaporator	Anti-corrosion coating
Defrost	Automatic / manual
Equipped with	Core Probe, 60x40 - GN 1/1 trays rack

* Evap -10°C / Cond 45°C

Options:


- HACCP Control
- Pivoting wheels kit
- Ozone sanitization kit



Cycles:

- Blast chilling soft & hard
- Deep freezing soft & hard
- Core probe or timed cycle
- Positive or negative storage at the end of each cycle

Part nr.	Description
1	Digital Control
2	Air intake (clean regularly)
3	Power cord

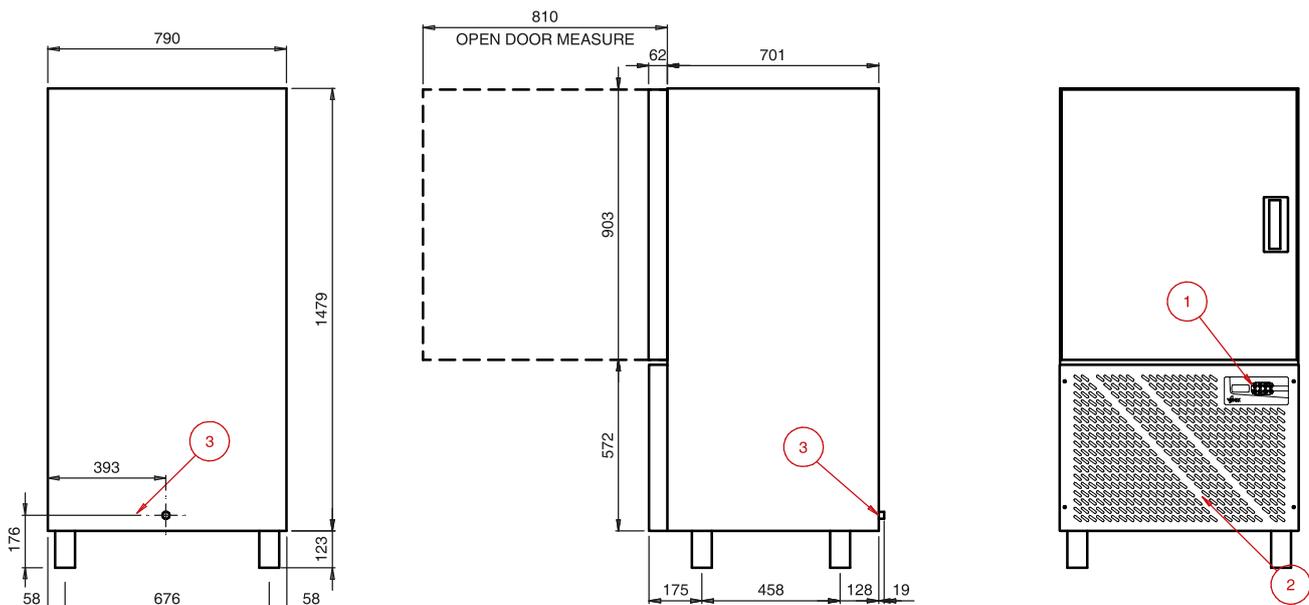

Technical features, descriptions, finishing, depicted drawings, codes can be subjected to change without our notice. Colors that are reproduced are for reference only; the representation in print may alter the color tones. Caractéristiques techniques, descriptions, finitions, dessins représentés, codes indiqués peuvent être soumis à des modifications sans préavis de notre part. Les couleurs reproduites sont uniquement à titre indicatif; la représentation en version imprimée peut modifier la tonalité des couleurs.

